



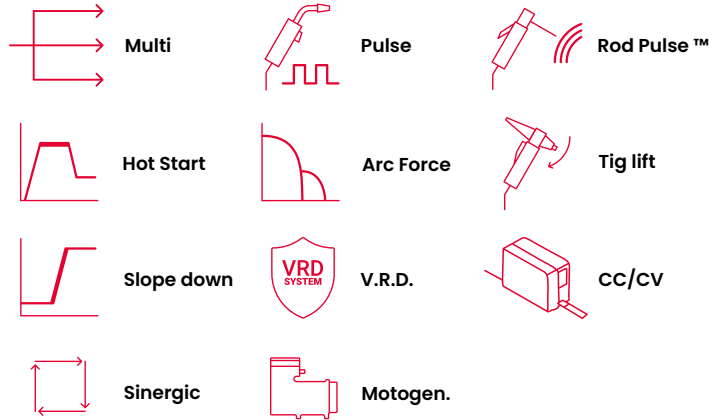

S400 F40

Inverter Mig Pulsato 400V 3 phases



Standards and Warranty

60974-10 | 60974-5 | 60974-1



MADE IN ITALY



Inverter

Inverter technology concentrates high welding performance in a compact structure, improving welding and reducing dimensions and weights.

Nuovo Display 5"

The new 5" display introduces a new completely re-designed software interface to give a simplified user interface experience never seen before on a Stel welding machine.

Multiprocess

S400 F40 is a multiprocess power source: STICK, TIG LIFT, MIG MAG, PULSE MIG, DOUBLE PULSE MIG .

Tig lift

The Tig lift function allows perfect ignition with the Tig torch, available also adjustable slope down (0-10

seconds).

DigiMig Torch

Possibility to use a new Digital Torch with display. This offers the possibility of selecting welding parameters and programs in a clear and simple way directly from the torch handle.

Torch Calibration

This function provides a quick calibration procedure which, by automatically measuring the impedance of the welding circuit, allows you to always have precise and optimal performance even with different torch, interconnecting cable or ground cable length and material.

USB Port

The USB port allows for a quick

software updates, so your machine can always be updated with the latest release or any custom software that has been developed.

V.R.D.

Voltage Reduction Device is the possibility to reduce the No-Load Voltage below 20V to avoid the Electric Shock risk. Mandatory in many shipyards.

Fan Control

The fans are controlled by the Power Source which adjusts their intensity based on the current and the arc on time. Ideal for avoiding contamination in harsh environments.



Stel Welding Division
Via Del Progresso 59

36020 Castegnero
(VI) - Italy

Tel. +39 0444 639525
Tel. +39 0444 639682

sales@stelgroup.it
www.stelgroup.it




Technical Data

Main Voltage	400 V	Work Temperature	40°C
Phases	3	Current Range	4-400 A
Frequency	50/60 Hz	Welding Current 40% (25°C)	400 A
Real Current (35%)	19 A	Welding Current 100% (25°C)	350 A
Real Power (35%)	11,2 KVA	Welding Current 35% (40°C)	400 A
Power Factor	0,85	Welding Current 60% (40°C)	350 A
Efficiency	85%	Welding Current 100% (40°C)	300 A
No Load Voltage	70 V	Earth Clamp	70 mm ²
Degree of Protection	IP 23	Wire Feeder Rollers	4
Insulation Class	H	Length x Width x Height	1040x500x1430
Safety Approved		Weight	120 Kg

The data were collected at a temperature of 40 °C

F40 Front Panel Description

- | | | |
|---|--------------------------------------|--------------------------------------|
| 1. Encoder Wire Speed / Current regulation | 3. Functions Selection Button | 6. Functions Selection Button |
| 2. MODE button | 4. Functions Selection Button | 7. Encoder V / SET regulation |
| | 5. Functions Selection Button | 8. Machine live led |

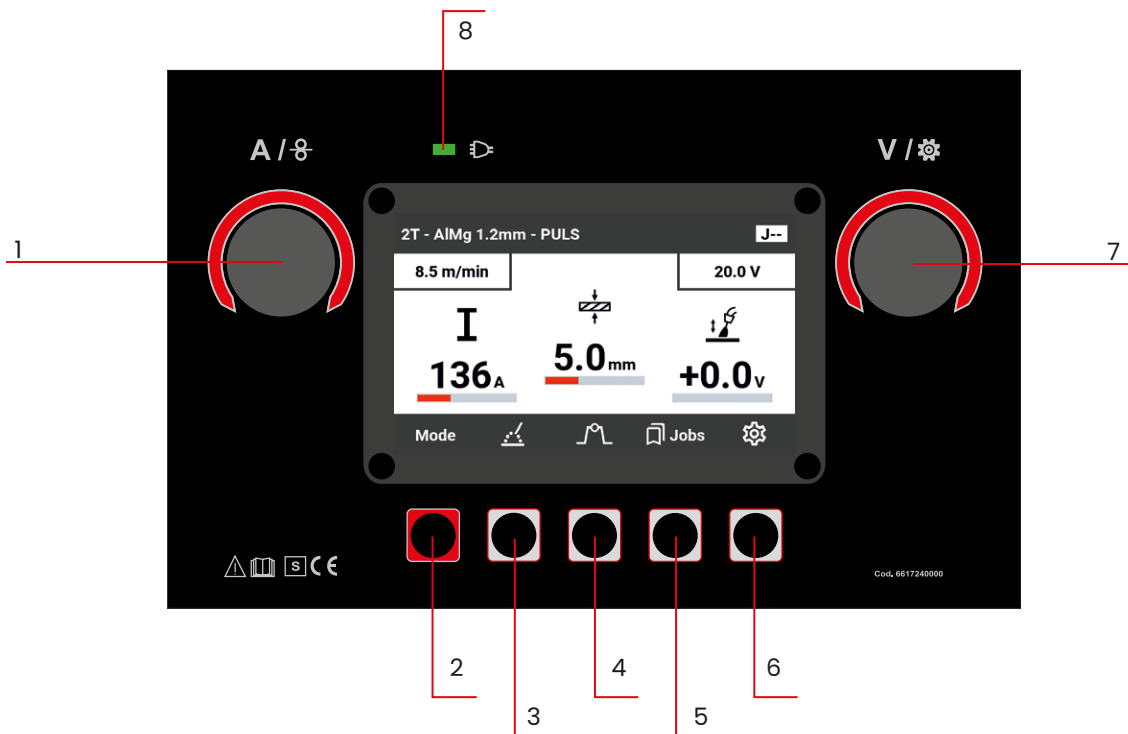

Synergic Program List

Fe 0.8mm M21
 Fe 1.0mm M21
 Fe 1.2mm M21
 Fe 1.6mm M21
 Fe 0.8mm M20
 Fe 1.0mm M20
 Fe 1.2mm M20
 Fe 0.8mm CO2
 Fe 1.0mm CO2
 Fe 1.2mm CO2
 Fe 0.8mm MIX PULSED
 Fe 1.0mm MIX PULSED
 Fe 1.2mm MIX PULSED

SS 0.8mm 98/2
 SS 1.0mm 98/2
 SS 1.2mm 98/2
 SS 0.8mm 98/2 PULSED
 SS 1.0mm 98/2 PULSED
 SS 1.2mm 98/2 PULSED
 2209 1.0mm 98/2 PULSED
 2209 1.2mm 98/2 PULSED
 2507 1.2mm 98/2 PULSED
 AlMg5 1.0mm
 AlMg5 1.2mm
 AlSi5 1.0mm
 AlSi5 1.2mm

AlMg5 1.0mm PULSED
 AlMg5 1.2mm PULSED
 AlMg5 1.6mm PULSED
 AlSi5 1.0mm PULSED
 AlSi5 1.2mm PULSED
 AlSi5 1.6mm PULSED
 CuSi 0.8mm
 CuSi 1.0mm
 CuSi 1.0mm PULSED
 Metalcored 1.2mm
 Fluxcored 1.2mm
 Metalcored 1.2mm PULSED
 Inconel 1.2mm PULSED

Accessories

1. 6941800000

Warranty Extension 3&5 YEARS

2. 601858000L

Trolley S400

3. 601862000L

KIT Wheels for Feeder

4. 601857000L

Cooling Unit C10 (Liquid NOT Included)

5. 600239000L

5L Tank Cooling liquid STELFreeze

6. 601815000L

Torch Push-Pull + Interface PCB KIT

7. 601865000L

Interconnecting Cable 50mm² 2m Air

8. 601891000L

Interconnecting Cable 50mm² 2m H2O

9. 601866000L

Interconnecting Cable 70mm² 5m Air

10. 601868000L

Interconnecting Cable 70mm² 5m H2O

11. 601867000L

Interconnecting Cable 70mm² 10m Air

12. 601869000L

Interconnecting Cable 70mm² 10m H2O

13. 601877000L

Interconnecting Cable 70mm² 25m Air

14. 601878000L

Interconnecting Cable 70mm² 25m H2O

15. 6015130000

Torch Mig TMS 500 3m H2O

16. 6015140000

Torch Mig TMS 500 4m H2O

17. 6018750000

Torch Digi Mig 3m H2O

18. 6018760000

Torch Digi Mig 4m H2O

19. 6350700000

Roll d.37 0,8-1,0 Carbon Steel

20. 6360600000

Roll d.37 1,0-1,2 Carbon Steel

21. 6360700000

Roll d.37 1,2-1,6 Carbon Steel

22. 6361600000

Roll d.37 1,0-1,2 Flux Cored

23. 6360800000

Roll d.37 1,2-1,6 Flux Cored

24. 6367200000

Roll d.37 1,6-2,4 Flux Cored

25. 6345200000

Roll d.37 1,0-1,2 Aluminium

26. 6360900000






Roll d.37 1,6-2,4 Aluminium

27. 6055900000

Gas Regulator 2 Gauges (Italian Gas Connection)

28. 6014910000

Helmet Aspire Jackson



Stel Welding Division
 Via Del Progresso 59

36020 Castegnero
 (VI) - Italy

Tel. +39 0444 639525
 Tel. +39 0444 639682

sales@stelgroup.it
 www.stelgroup.it

